

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
29 March 2001 (29.03.2001)

PCT

(10) International Publication Number
WO 01/22185 A1

(51) International Patent Classification⁷: G05D 7/01.
F16K 15/02

(21) International Application Number: PCT/EP00/07353

(22) International Filing Date: 29 July 2000 (29.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
TO99A000802 21 September 1999 (21.09.1999) IT

(71) Applicant (for all designated States except US): MASCO
CORPORATION OF INDIANA [US/US]; 55 East 111th
Street, Indianapolis, IN 46280 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): KNAPP, Alfons
[DE/DE]; Klockstrasse 15, D-88400 Biberach (DE).

(74) Agents: OPPERMANN, Ewald et al.; Oppermann & Op-
permann, Am Wiesengrund 35, D-63075 Offenbach (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ,
DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR,
HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR,
LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ,
NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,
IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG,
CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: AUTOMATIC VALVE FOR THE STABILIZATION OF A THERMOSTATIC MIXING DEVICE

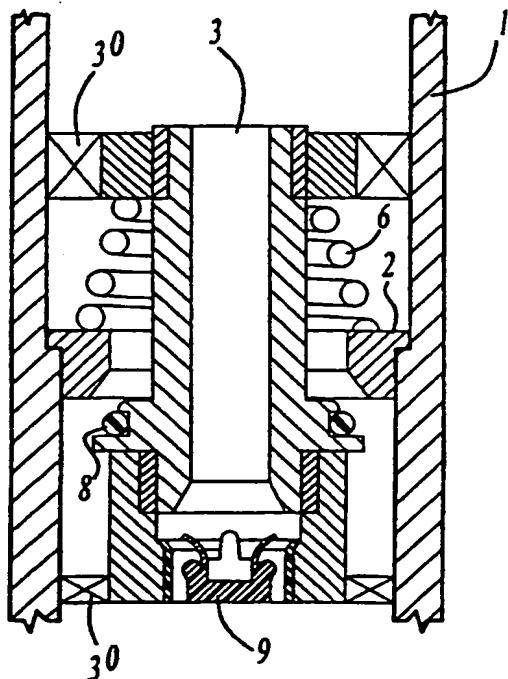

(57) Abstract: A valve intended for installation in the inlet of a thermostatic mixing device comprises a tubular body (1) intended to be inserted in a water supply pipe, a holding seat (2) presented by the body (1), and a cursor (3) that can be moved in the body (1) with respect to the seat (2) between a first position (Figure 12) in which it at least partly occludes the seat (2) and a second position (Figure 13) in which it leaves the seat (2) substantially clear. The cursor (3) is subjected, on the one hand, to the pressure of the water supply pipeline and, on the other hand, to the pressure existing inside the thermostatic mixing device. The valve further comprises a spring (6) that works on the cursor (3), pushing it toward the occlusion position. The valve can also comprise means that act as a non-return valve, and it can be equipped with a flow rate regulator (9).

WO 01/22185 A1

WO 01/22185 A1